


**STREET LED**  
Flood Lighting

**SMS1**  
CREE ⇄ PHILIPS



POWER	20W	30W	40W	60W
Lumen	2,700lm	4,050lm	5,400lm	8,100lm
Voltage	AC 95~305V, 50/60Hz DC 24-65V			
LED Type	CREE			
LED Driver	Philips	Philips	Philips	Philips
CRI	>70			
Lens type	W / N / B			
Efficiency	92%	92%	92%	92%
Operating temp	-20°C + 50°C			
IP Rating	IP67			
Net weight	4.3kg	4.3kg	4.3kg	4.3kg
Packing size	54 x 25.3 x 17.3cm	54 x 25.3 x 17.3cm	54 x 25.3 x 17.3cm	54 x 25.3 x 17.3cm
Life-time	50,000h			
Warranty	5 years			

**THE BEST LUMENS/DOLLAR VALUE ON THE MARKET.**

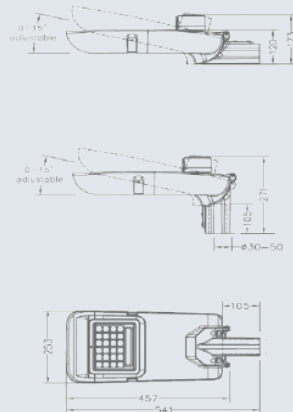

**DESIGNED FOR USE IN:**

- STREET LIGHTS
- CAR PARKS
- GENERAL PUBLIC LIGHTING
- Bridges
- Tunnels
- Ramps

**COLOUR TEMPERATURES**

WARM WHITE 2700K - 3000K  
COOL WHITE 5900K - 6500K

All colour temperatures are indicative.

**HEAVY-DUTY, MULTIPURPOSE STREET LED PANEL DESIGNED FOR PUBLIC AREAS & SPOTLIGHTING APPLICATIONS.**

- ⇒ Incorporated latest generation of 135LM/w CREE Chip.
- ⇒ Philips high efficiency reliable driver with very long-life time expectancy.
- ⇒ Philips driver dimable control 1-10V , DALI , City Touch
- ⇒ 5 and 7 pin photometric control NEMA receptacles
- ⇒ Design life of twenty years.
- ⇒ High UV resistance and low maintenance costs
- ⇒ Hinged access cover with quick release clip
- ⇒ Modern design, light weight, easy installation.



- 20°C ~ +50°C WORKING TEMPERATURE
- 50000h LIFETIME RANGE
- 3000K, 4000K, 5000K COLOR TEMPERATURE
- AC 95~305V, 50/60Hz DC 24-65V VOLTAGE RANGE

[www.ledtec.com.au](http://www.ledtec.com.au)

@ info@ledtec.com.au  
1300 533 832



MINING



INDUSTRIAL



COMMERCIAL



PUBLIC